


TOP VIEW



NOTES:

- 1) DIRTBAG TO BE PLACED ON AGGREGATE OR STRAW
- 2) SEAMS MUST BE HIGH STRENGTH DOUBLE STITCHED "J" SEAMS
- 3) SEAM MUST BE TESTED UNDER ASTM D-4884. ACF TEST RESULTS AVAILABLE UPON REQUEST

CROSS SECTION

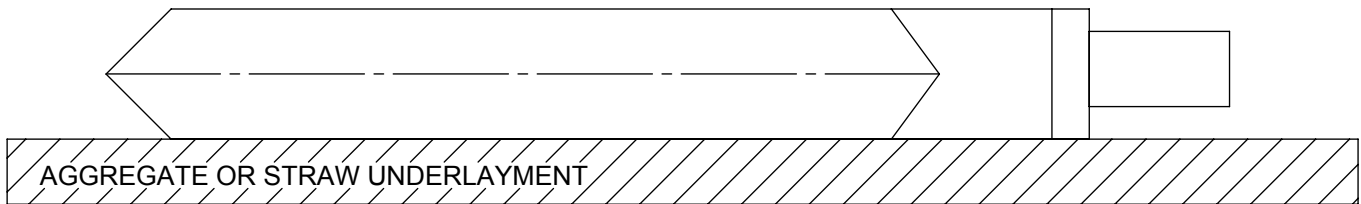

DB55 FABRIC PROPERTIES

PROPERTY	TEST METHOD	MARV
TENSILE STRENGTH	ASTM D-4632	205 LBS
ELONGATION	ASTM D-4632	50%
CBR PUNCTURE	ASTM D-6241	525 LBS
UV RESISTANCE	ASTM D-4355	70%
AOS	ASTM D-4751	80 US SIEVE
PERMITTIVITY	ASTM D-4491	1.4 SEC-1
FLOW RATE	ASTM D-4491	90 GPM/SF



CORPORATE OFFICE:
 2831 CARDWELL ROAD
 RICHMOND, VA 23234
 PH: 800-448-3636
 WWW.ACFENVIRONMENTAL.COM

ACF DB55 DIRTBAG

FOR ADDITIONAL INFORMATION PLEASE CONTACT ACF ENVIRONMENTAL
 PH: 800-448-3636 / WWW.ACFENVIRONMENTAL.COM