


STRAP TO EXTEND  
PAST CORNER OF  
BAG INTO 6" LOOP  
(TYP. PER 4)


## TOP VIEW

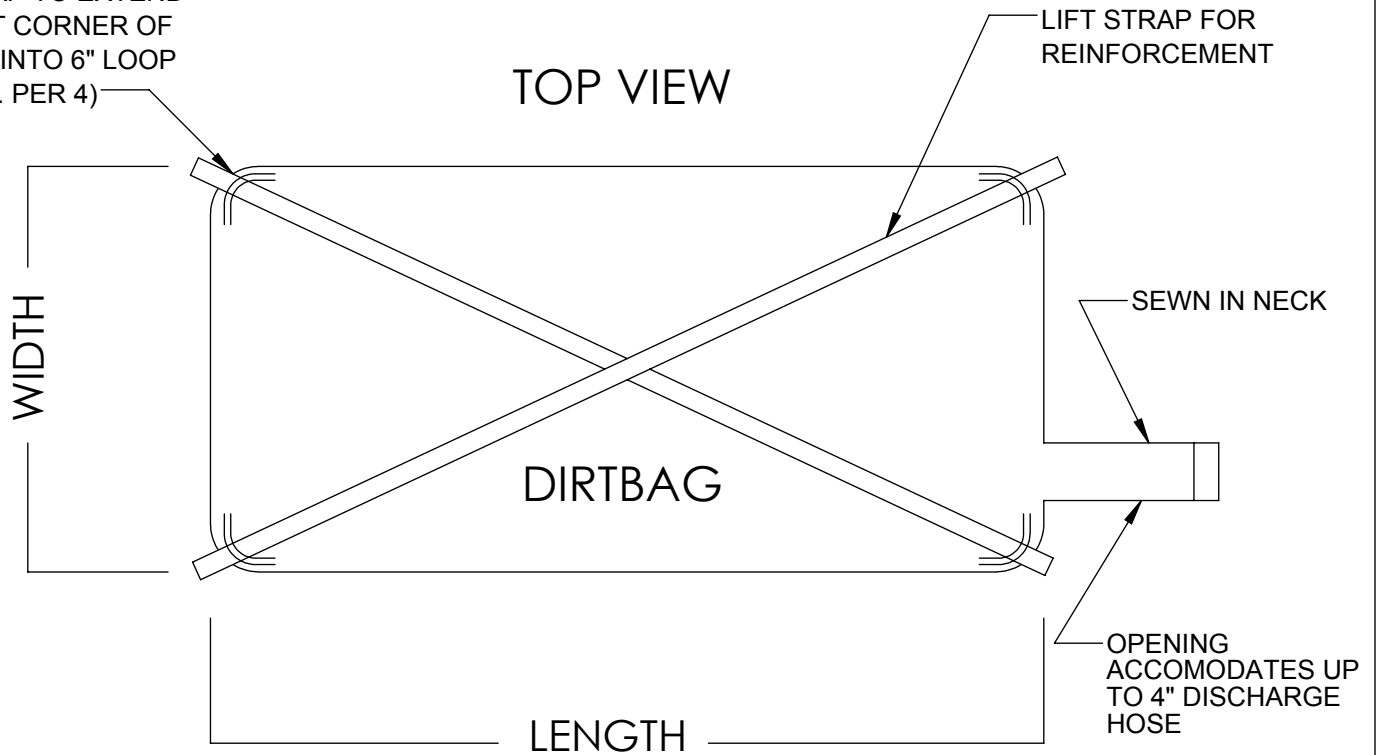

### NOTES:

- 1) DIRTBAG TO BE PLACED ON AGGREGATE OR STRAW
- 2) SEAMS MUST BE HIGH STRENGTH DOUBLE STITCHED "J" SEAMS
- 3) SEAM MUST BE TESTED UNDER ASTM D-4884. ACF TEST RESULTS AVAILABLE UPON REQUEST

## CROSS SECTION

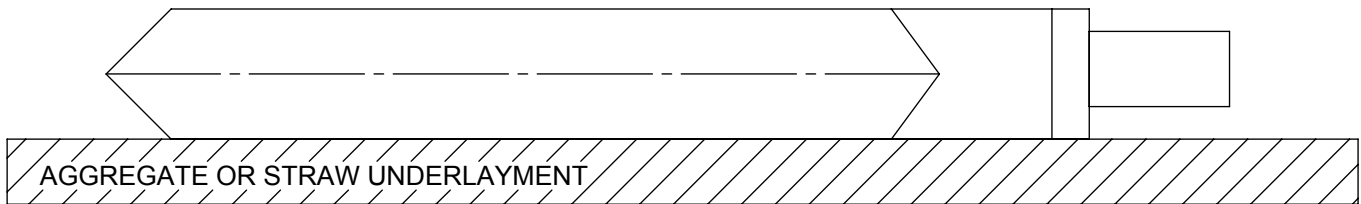

### DB55 FABRIC PROPERTIES

PROPERTY	TEST METHOD	MARV
TENSILE STRENGTH	ASTM D-4632	205 LBS
ELONGATION	ASTM D-4632	50%
CBR PUNCTURE	ASTM D-6241	525 LBS
UV RESISTANCE	ASTM D-4355	70%
AOS	ASTM D-4751	80 US SIEVE
PERMITTIVITY	ASTM D-4491	1.4 SEC-1
FLOW RATE	ASTM D-4491	90 GPM/SF



**CORPORATE OFFICE:**  
2831 CARDWELL ROAD  
RICHMOND, VA 23234  
PH: 800-448-3636  
WWW.ACFENVIRONMENTAL.COM

### ACF DB55 (80Z) DIRTBAG

FOR ADDITIONAL INFORMATION PLEASE CONTACT ACF ENVIRONMENTAL  
PH: 800-448-3636 / WWW.ACFENVIRONMENTAL.COM