



TOP VIEW

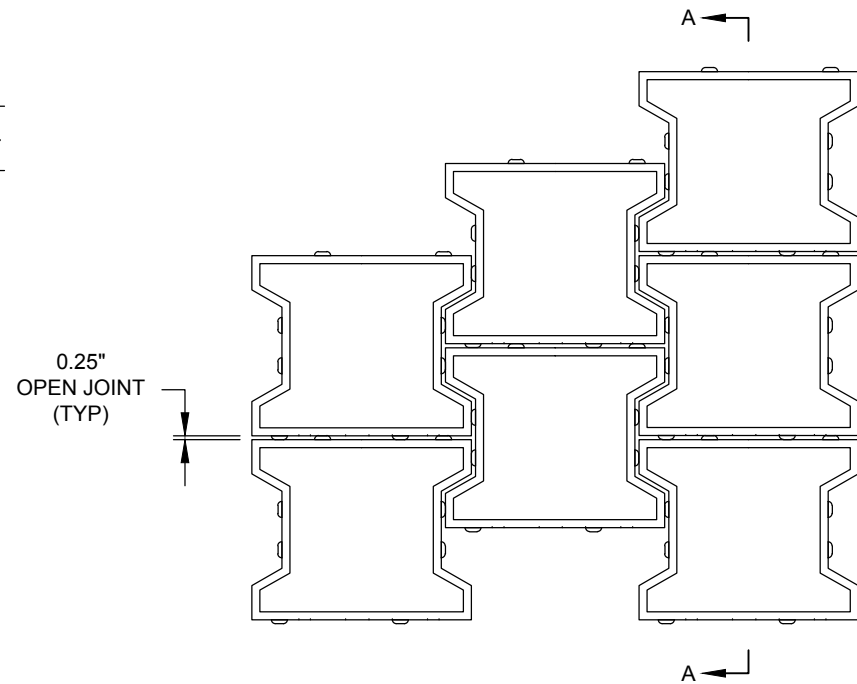

TOP VIEW  
INTERCONNECTED BLOCKS

\* 1/4" OPEN JOINTS SHALL BE UNFILLED AND FREE OF STONE/SAND BACKFILL.

<b>** RECOMMENDED STONE BASE DEPTHS</b>	
DEPTHS LISTED BELOW ARE SUBJECT TO CBR TESTS AND THE DESIGN ENGINEER'S SUBGRADE SUPPORT CALCULATIONS.	
PEDESTRIAN TRAFFIC	6"-8" MIN.
PASSENGER VEHICLE TRAFFIC	12" MIN.
INDUSTRIAL TRAFFIC	18" MIN.

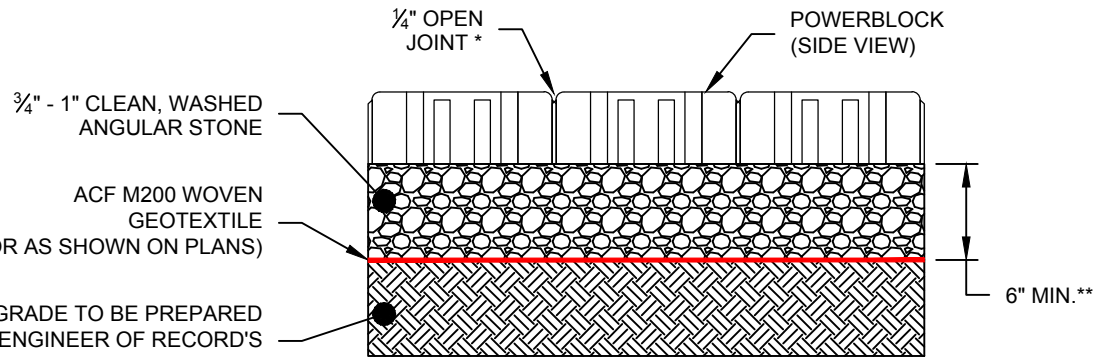

SECTION A-A VIEW



# ACF POWERBLOCK OPEN JOINT PAVER

FOR ADDITIONAL INFORMATION PLEASE CONTACT: ACF ENVIRONMENTAL, 1-800-448-3636, [www.acfenvironmental.com](http://www.acfenvironmental.com)