

HARD TOP P4 - SPECS

POLYETHYLENE SUMP (4 DRUMS)

SPILL CONTAINMENT

Drain	Colors	Length	Width	Height	Weight	Load Capacity UDL	Sump Capacity
No	Yellow/ Grey	57"	54"	64.5"	226 lbs	6,000 lbs	66 gallons
Yes	Yellow/ Grey	57"	54"	64.5"	226 lbs	6,000 lbs	66 gallons

Description: A polyethylene sump large enough to store and secure four 55- Gallon drums. In the event of a leak, fluid is contained in the sump preventing contamination to surrounding environment. Locking doors allow you to easily access drum when needed and secure them when not in use.

Application: For storage of both steel and polyethylene drums and smaller containers which need to meet containment regulations and/or for general housekeeping purposes.

Product Features: The Hard Top P4 helps you comply with containment regulations while storing steel and poly drums. Capture leaks, drips, and spills to keep floors dry and workers safe.

- Molded-in sump catches leaks, drips and spills to help you comply with regulations and keep your storage area clean and safe.
- Linear Low-density Polyethylene construction resists UV rays, rust, corrosion and most chemicals for long trouble-free life of the product.
- Rugged design has 4-way forklift accessibility.
- Meets SPCC, EPA Container Storage Regulation 40 CFR 264.175 Spill Containment Regulations.

Composition: 100% polyethylene with UV inhibitors.

Helps you comply with: 40 CFR 112.7 and 40 CFR 264.175

Additional Specifications: Grate dimensions: 2 - 48"x24"


Disclaimers:

Flammables Notice: If using this product with flammable liquids, please consider the regulations that apply to storage and handling of flammable liquids and the safety of this application, specifically flammable vapors, static discharge and heat sources.

WARNING: Use of the ramp can expose you to chemicals including carbon tetrachloride and nickel, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov.

Forklift Pockets:

Forklift Pocket Dimensions for:
Ultra-Spill Pallet P4
Ultra-Spill Pallet P4, Economy Model

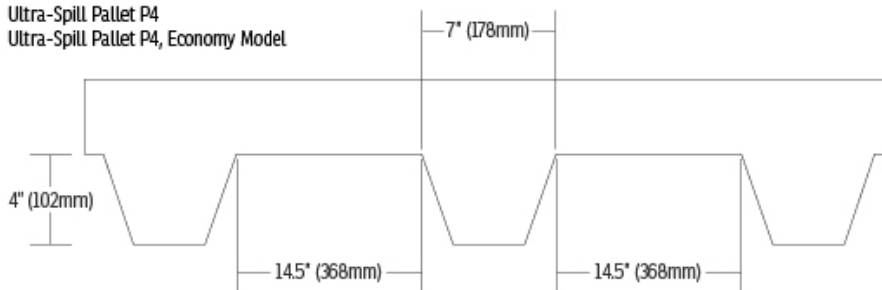

HARD TOP P4 - SPECS LOADING RAMP

SPILL CONTAINMENT

Color	Material	Length	Width	Height	Weight	Load Capacity UDL	Usable Width
Black	Ramp: Polyethylene Plate: Steel	55.5"	28.5"	8.75"	43 lbs	700 lbs	26"

Steel plate (8" length) secures ramp to pallet or deck and provides a smooth transition for loading and unloading


Disclaimers:

Flammables Notice: If using this product with flammable liquids, please consider the regulations that apply to storage and handling of flammable liquids and the safety of this application, specifically flammable vapors, static discharge and heat sources.

WARNING: Use of the ramp can expose you to chemicals including carbon tetrachloride and nickel, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov.

Instructions:

1. Remove the nut and bolt from each side of the ramp.
2. Position the end plate as shown
3. Place a flat washer over the bolt and slide the bolt through the hole on the outside wall of the ramp.
4. Insert the ramp end plate tabs into the slots in the front of the ramp.
5. Pass the bolt through the hole in the end plate tab and the next hole in the ramp.
6. Slide a flat washer over the end of the bolt and attach the hex nut. Be careful not to overtighten.
7. Repeat steps 1-6 for other side.

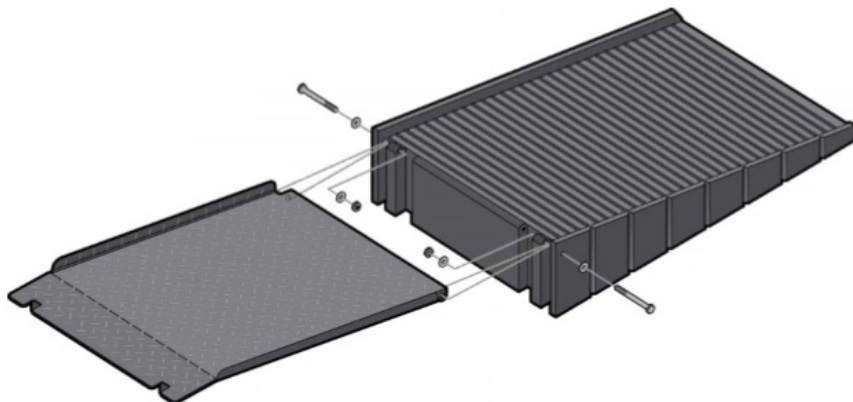

MAINTENANCE/CARE

POLYETHYLENE SPILL CONTAINMENT PRODUCTS

SPILL CONTAINMENT

1. There is no specific need to clean one of our polyethylene spill containment products that has not had a spill or leak as the polyethylene plastic material it is constructed from is designed to last for years in most indoor or outdoor environment. The polyethylene has a UV protective additive for prolonged outdoor exposure.
2. The products are rated for use in temperatures from -40° F to 160° F.
3. The sump area of the product should be inspected weekly for any spills or leaks. If a spill or leak is discovered, it should be cleaned up within 24 hours. If inspection shows the sump area has a crack or hole or other damage that could affect the functionality of the unit, it should be immediately removed from service.
4. To clean up a spill or a leak, use all safety precautions required for handling the particular chemical involved. Using a safe pumping method for the chemical involved, pump the spilled contents out of the containment sump and into a drum or container for proper disposal or reuse. If the chemical involved is not safe to pump, use absorbents or other means to remove the chemical from the containment sump safely. Dispose of any chemicals, used sorbents or other disposables in compliance with your local or federal regulations.
5. Once the chemical has been removed, use a sorbent mat or pad to wipe down the inside of the containment unit to remove any remaining chemical residue. Finish by washing with soap and water and allow the unit to dry before placing back into service.
6. The unit's grating should be cleaned of any residual chemical and cleaned with soap and water.
7. If the unit had a drain plug that was removed to drain off any chemical or soap/water, be sure to replace the drain plug securely.
8. Spill Deck Bladder System special instructions:
 - a. Use a hand pump with a ½" diameter tube and insert the tube into the opening of the bladder from inside the Spill Deck after removing the grate.
 - b. Pump the contents of the bladder and the Spill Deck into a drum or container for proper disposal or reuse.
 - c. If there is some remaining residue inside the bladder, lift the outside end of the bladder and allow the residue to pour back into the Spill Deck sump where it can be pumped out or absorbed with sorbents.
 - d. Remove the bladder from the Spill Deck by uncrewing the bulkhead fitting and dispose of the bladder properly according to local and federal regulations. **DO NOT REUSE A BLADDER.** After the Spill Deck has been cleaned up, place a new bladder into the Bladder Attachment and attach it to the Spill Deck following the instructions that accompany the replacement bladder.

CHEMICAL COMPATABILITY

POLYETHYLENE SPILL CONTAINMENT PRODUCTS

SPILL CONTAINMENT

This listing was prepared to provide guidance to the chemical compatibility of Ultra Environmental Containment Products which are manufactured and constructed of a molded polyethylene.

Polyethylene is susceptible to attack by some chemicals which may cause stress cracking, swelling, oxidation or may permeate the polyethylene. These reactions may reduce the physical properties of polyethylene.

When considering an UltraTech polyethylene product for use in secondary containment applications, it is important to note that most secondary containment products are designed to hold leaked chemicals for only hours, a day, at most a week. These secondary containment units would then be cleaned of any chemical. In these short term applications, a greater variety of chemicals may be used with the polyethylene since the exposure time of the chemical to the polyethylene is limited.

- A. Suitable for long term storage at 100 degrees F or less.
- B. Suitable for short term storage less than one year.
- C. Do NOT store these chemicals in UltraTech containers.
- D. User testing may prove some of these chemicals are suitable for secondary containment applications with exposure time of one week or less.

Acetaldehyde (40%), A
Acetamide, A
Acetic Acid (50%), A
Acetic Acid Anhydride, B
Acetic Ether, B
Acetone, A
Acetylene Tetrabromide, B
Acrylic Emulsions, B
Acrylonitrile, A
Adipic Acid, A
Aliphatic Hydrocarbons, A
Alkaline, A
Allyl Alcohol (96%), A
Aluminum Chloride (20%), A
Aluminum Fluoride, A
Aluminum Hydrogen Solution (10%), A
Aluminum Hydroxide, A
Alums (All Types), A
Ammonia (Aqueous), A
Ammonium Acetate, A
Ammonium Bifluoride, A
Ammonium Carbonate (50%), A
Ammonium Chloride, A
Ammonium Hydrogen Fluoride (50%), A
Ammonium Hydroxide, A
Ammonium Metaphosphate Sat'd, A

Ammonium Nitrate Sat'd, A
Ammonium Persulfate Sat'd, A
Ammonium Phosphate, A
Ammonium Salts, A
Ammonium Sulfate Sat'd, A
Ammonium Sulfide, Sat'd, A
Ammonium Thiocyanate Sat'd, A
Amyl Acetate, A
Amyl Alcohol (100%), A
Amyl Chloride, C
Aniline (100%), B
Aniline Hydrochloride, B
Anti Freeze, A
Antimony Salts, A
Antimony Trichloride (90%), A
Aqua Regia, C
Aqueous Alkalies (NaOH), A
Arsenic Acid, A
Barium Carbonate, A
Barium Chloride, A
Barium Cyanide, A
Barium Hydroxide, A
Barium Nitrate, A
Barium Salts, A
Barium Sulfate, A
Barium Sulfide, A
Battery Fluid, Acid, B
Benzaldehyde, A

Benzene Sulfonic Acid, B
Benzene, B
Benzoic Acid, A
Benzyl Alcohol, A
Benzyl Chloroformate, A
Boric Acid Conc., A
Boric Acid Dilute, A
Borzx Cold Sat'd, A
Bromine, Liquid, C
Bromine, Water, C
Bromobenzene, C
Bromoform, C
Butadiene, A
Butanediol (100%), A
Butanol, A
Butyl Acetate, A
Butyl Alcohol (100%), A
Butyl Phenol, C
Butylene Glycol, A
Butylene Liquid, C
Butylene, C
Butyric Acid, A
Calcium Carbonate, A
Calcium Chloride, A
calcium Hydroxide, A
Calcium Hypochlorite, A
Calcium Nitrate (50%), A
Calcium Sulfate, A

CHEMICAL COMPATABILITY CONTINUED...

SPILL CONTAINMENT

- A. Suitable for long term storage at 100 degrees F or less.
- B. Suitable for short term storage less than one year.
- C. Do NOT store these chemicals in UltraTech containers.
- D. User testing may prove some of these chemicals are suitable for secondary containment applications with exposure time of one week or less.

Carbon Bisulfide, C	Diphenyl Oxide, C	Hydrogen Phosphide (100%), A
Carbon Disulfide, C	Disodium Phosphate, A	Hydrogen Sulfide, A
Carbon Monoxide, A	Electrolyte, A	Hydroiodic Acid (All Conc.), A
Carbon Tetrachloride, C	Ethanol, A	Hydroquinone, A
Carbonic Acid (Aq. CO ₂), A	Ether, C	Hydrosulfite (10%), A
Caustic (Aqueous), A	Ethyl Acetate (100%), B	Hydroxylamine Sulfate, A
Caustic Potash Sol. (50%), A	Ethyl Alcohol, A	Hydrozine (35%), A
Caustic Soda Sol. (10%), A	Ethyl Butyrate, B	Hydrozine Hydrochloride, A
Chloroacetic Acid, A	Ethyl Chloride, C	Hypochlorous Acid, A
Chlorobezene, A	Ethyl Ether, C	Iso Octane, B
Chloroform, C	Ethylene Chloride, C	Isopropyl Acetate, A
Chloromethane, C	Ethylene Chlorohydrin, A	Isopropyl Alcohol, A
Chlorsulfonic Acid (100%), C	Ethylene Diamine, A	Isopropyl Ether, C
Chrome Alum Sat'd, A	Ethylene Dichloride, C	Jet Fuel, B
Chromic Acid (50%), B	Ethylene Glycol, A	Kerosene, B
Clycolic Acid (All Conc.), A	Ethylene Oxide, C	Lactic Acid (All Conc.), A
Copper Cyanide, A	Fatty Acids, A	Lead Acetate Sat'd, A
Cresylic Acid, A	Ferric Sulfate, A	Magnesium Carbonate, A
Crotonic Aldehyde, A	Ferrous Salts, A	Magnesium Hydroxide, A
Cuprous Chloride Sat'd, A	Ferrous Sulfate, A	Magnesium Nitrate, A
Cyclohexanone, B	Fluoboric Acid, A	Magnesium Oxide, A
Cyclohexane, A	Fluosilicic Acid (All Conc.), A	Magnesium Salts, A
Cyclohexanol, A	Formaldehyde (40%), A	Magnesium Sulfate, A
Dextrin Sat'd, A	Formamide, A	Maleic Acid, A
Dextrose Sat'd, A	Formic Acid (All Conc.), A	Methanol, A
Di Isobutyl Ketone, B	Fuel Oil, A	Methyl Acetate, A
Dibutyl Ether, C	Furfural (100%), A	Methyl Alcohol (100%), A
Dibutyl Sebacate, B	Furfuryl Alcohol, C	Methyl Amine (32%), A
Dibutylphthalate, B	Gallic Acid Sat'd, A	Methyl Bromide, C
Dichloroacetic Acid, B	Gasoline, A	Methyl Chloride, C
Dichlorobenzene, Liquid, C	Gluconic Acid (All Conc.), A	Methyl Ethyl Ketone, B
Dichloroethylene, C	Glycerine, A	Methyl Isobutyl Ketone, B
Diesel Fuel, B	Glycol, A	Methyl Isopropyl Ketone, B
Diesel Oil, B	Heptane, A	Methyl Sulfate, A
Diethanolamine, B	Hexane, A	Methyl Sulfuric Acid (All Conc.), A
Diethyl Carbonate, A	Hydrazone Hydrate, A	Methylene Chloride, C
Diethylene Glycol, A	Hydrobromic Acid (50%), A	Mineral Oils, A
Diglycolic Acid (30%), A	Hydrochloric Acid (All Conc.), A	Monochloroacetic Acid Ethyl Ester, A
Dimethyl Formamide, B	Hydrocyanic Acid Sat'd, A	Monochloroacetic Acid Methyl Ester, A
Dimethylamine, B	Hydrofluoric Acid (All Conc.), A	
Dinonyl Phthalate, C	Hydrofluorisilicic Acid (All Conc.), A	Mowilith D, A
Diocetyl Phthalate, C	Hydrogen Bromide (10%), A	Naptha, B
Dioxane, A	Hydrogen Peroxide (90%), A	Napthalene, B

CHEMICAL COMPATABILITY CONTINUED...

SPILL CONTAINMENT

- A. Suitable for long term storage at 100 degrees F or less.
- B. Suitable for short term storage less than one year.
- C. Do NOT store these chemicals in UltraTech containers.
- D. User testing may prove some of these chemicals are suitable for secondary containment applications with exposure time of one week or less.

Nicotine Dilute, A
Nicotinic Acid, A
Nitric Acid <50%, A
Nitrobenzene, B
Nitrotoluene, B
Octyl Cresol, A
Oleic Acid (All Conc.), A
Oleum Conc., C
Oxalic Acid (All Conc.), A
Palmitic Acid, C
Paraffin Emulsions, A
Perchloric Acid (50%), A
Perchloroethylene, B
Petroleum Ether, B
Petroleum, A
Phenylhydrazine, C
Phosphoric Acid (All Conc.), A
Phosphorous (Yellow 100%), A
Phosphorous Chlorides, B
Phosphorous Pentoxide, A
Photographic Solutions, A
Phthalic Acid (All Conc.), A
Phthalic Anhydride, A
Pickling Baths

- Sulfuric Acid, A
- Hydrochloric Acid, A

Picric Acid (1%), A
Plating Solutions, A
Potassium Aluminum Sulfates (50%), A
Potassium Bichromate, A
Potassium Borate (10%), A
Potassium Bromide, A
Potassium Chlorate, A
Potassium Chloride, A
Potassium Chromate, A
Potassium Cyanide, A
Potassium Dichromate (40%), A
Potassium Ferri Ferro Cyanide Sat'd, A
Potassium Fluoride, A
Potassium Hydroxide, A
Potassium Nitrate Sat'd, A

Potassium Perborate Sat'd, A
Potassium Perchlorate, A
Potassium Phosphates, A
Potassium Sulfate, A
Propanol, A
Propargyl Alcohol (7%), A
Propionic Acid (50%), A
Propyl Alcohol, A
Propylene Dichloride (100%), A
Propylene Glycol, A
Propylene Oxide, A
Pyridine, B
Selenic Acid, A
Sewage, A
Silicic Acid, A
Silver Nitrate, A
Soda Ash, A
Sodium Acetate Sat'd, A
Sodium Benzoate, A
Sodium Bisulfate (10%), A
Sodium Bisulfite, A
Sodium Bromate, B
Sodium Chloride, A
Sodium Chlorite, A
Sodium Chromate, A
Sodium Disulfite, A
Sodium Dithionite (10%), A
Sodium Fluoride Sat'd, A
Sodium Hydroxide Conc., A
Sodium Hypochlorite, A
Sodium Nitrate, A
Sodium Oxalate, A
Sodium Persulfate, A
Sodium Phosphate, A
Sodium Sulfonates, A
Stearic Acid (All Conc.), A
Succinic Acid, A
Sulfuric Acid (98%), B
Sulfuric Acid, Fuming, C
Sulfurous Acid, A
Sulfuryl Chloride, C
Tartaric Acid Sat'd, A
Tetrachlorethylene, C

Tetrachloroethane, C
Tetrahydrofurane, C
Tetrahydronaphthalene, C
Thionyl Chloride, C
Titanium Salts, B
Toluene Sulfonic Acid (All Conc.), B
Toluene, B
Transformer Oil, A
Tributylphosphate, A
Trichloroacetic Acid, B
Trichloroethane, C
Trichloroethylene, C
Trichloroethylene, C
Tricresyl Phosphate, A
Triethanolamine, A
Trioctyl Phosphate, C
Trisodium Phosphate Sat'd, A
Turpentine Oil, C
Xylene, C

Please check the following website for a complete and up to date listing:

<https://www.spillcontainment.com/support/polyethylene/>